


IMPROVED FLEXIBILITY and SAFETY WITH BLUE HEAT TREATMENT



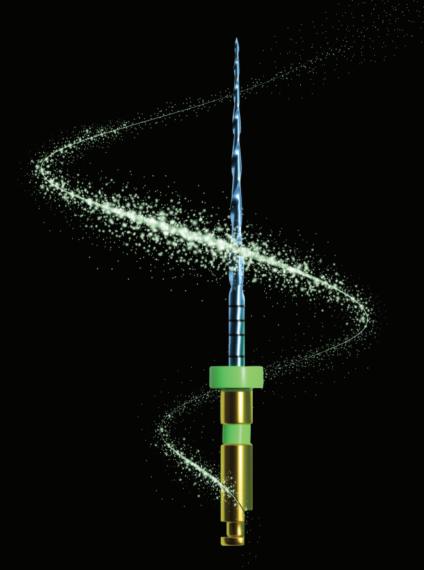

Rubber Stopper

Variable Pitch

Gradually-increased from tip to handle to prevent suction and locking



Ni-Ti Wire and Heat Treated **Control Memory Features:**

- Strengthen cyclic fatigue resistance
 Enhance flexibility
 Lower the risks of treatment





%4 Taper

%6 Taper



Precise Length Marking



Sharp Cutting Edge Optimizes treatment procedure



Safe Non-Cutting Tip

Decreases canal transportation, ledge formation and apical extrusion



Double S Cross-Section Effective debris removal

	Suggested Torque	2.5 N.cm					
	Suggested Speed	400 rpm					
ш.	Cross Section						
0	Length (mm)	21/25/31					
Z	Taper (%)	4	4	4	6	6	6
ш	Tip Size	20	25	35	20	25	35
	Color						

