


Features and highlights

- Capable**
 Six universal 10-bit inputs, three binary high-current relay outputs, two binary triac outputs, and one analog output.
- Interoperable**
 Fully BACnet-compliant on MS/TP LAN at up to 76.8 Kbps.



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to requirements of ASHRAE Standard 135 is the responsibility of the BACnet Manufacturers Association (BMA). BTL is a registered trademark of the BMA.

- Versatile**
 Fully programmable for fan-coil, unit ventilator, and other multi-speed fan or motor applications.
- Reliable**
 AZ60 processor and extensive onboard filtering, with all program data backed up in non-volatile flash memory.
- Fast**
 Internal logic loop of 100 msec.

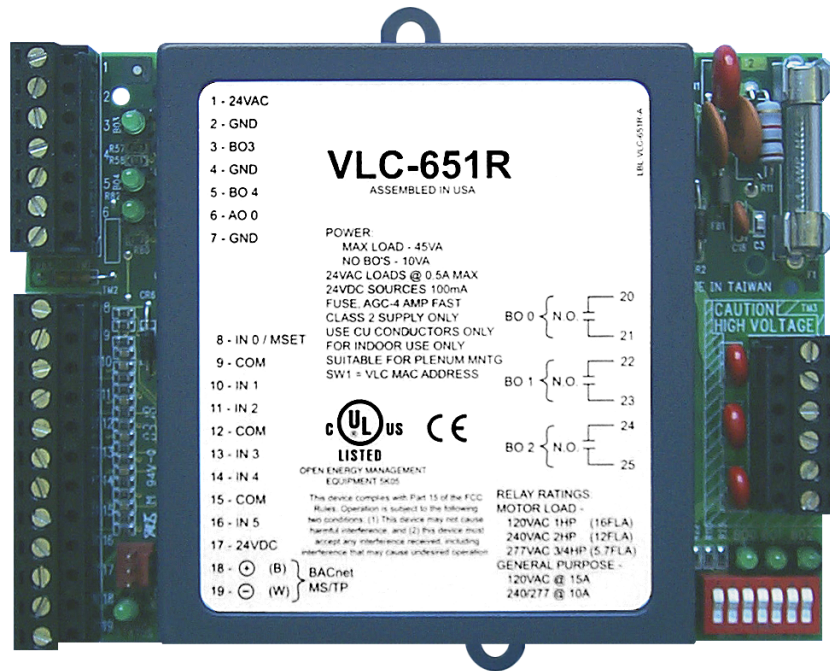

The Alerton BACtalk® VLC-651R is a versatile, fully programmable BACnet-compliant field controller. With three software-controlled high-current relays, the VLC-651R is well suited for unit ventilator and fan-coil applications, or any application that requires multi-speed fan or motor control. As a native BACnet controller, it integrates seamlessly with your BACnet system, communicating on a BACnet MS/TP LAN at up to 76.8 Kbps.

The VLC-651R supports the Alerton Microtouch™, as well as the Microset™ and Microset II intelligent wall sensors, which offer convenient data display, setpoint adjustment, and technician access to equipment setup parameters.

All VLC-651R control logic is programmed with Alerton's easy-to-learn graphical programming language, VisualLogic®. Programming and setup data is stored in non-volatile flash memory, ensuring stable and reliable operation.

The high-resolution 10-bit analog output is field-adjustable for thermistor/dry contact, 0–5 VDC/4–20 mA or 0–10 mA. High-resolution, 10-bit universal inputs are software configurable to accept various input types.

Technical Data

- **Power** 24 VAC @ 10 VA min., plus binary output loads (40 VA max). Utilizes a half-wave rectifier, which allows a single transformer to power multiple VLCs. One leg of 24 VAC connects to earth (panel) ground.
- **Inputs** Six universal inputs with 10-bit resolution. Input 0 can be used for a BACtalk® Microset™ or Microset II.
- **Binary Outputs**

Two hot-switched triac outputs, which have a common connection to the fused 24 VAC supply. Rated 24 VAC, 0.5 A.

Three independently isolated, normally open relay outputs. Motor load rating: 120 VAC 1 HP (15 FLA); 240 VAC 2 HP (12 FLA); 277 VAC 3/4 HP (6.9 FLA). General purpose rating: 120 VAC @ 15 A; 240/277 VAC @ 10 A.
- **Analog Output** Single 0–20 mA output with 10-bit resolution (4–20 mA is achieved in software) sourced by the VLC. 0–10 VDC is attained by wiring a 499 ohm 1/4W ±1% resistor across the 0–20 mA output terminals.
- **24 VDC Output** Uncontrolled output to provide up to 100 mA of 24 VDC power for transducers or other devices.
- **Processor & Memory** Motorola AZ-60 processor with on-board flash memory. Flash memory provides non-volatile program and data storage, and allows for encrypted updates to the program for future product enhancements.
- **Dimensions** 4.9" (125mm) H x 5.5" (140mm) W x 1.4" (36mm) D.
- **Terminations** Removable header-type screw terminals accept 14–24 AWG wire.
- **Environmental** 0–158 deg. F (-17–70 deg. C). 0–95% RH, non-condensing.
- **Communications** BACnet MS/TP LAN up to 76.8 Kbps.
- **BACnet Conformance** ASC level device; tested and approved by BTL. See Protocol Implementation Conformance Statement (PICS).
- **Ratings**

Listed Underwriters Laboratory for Open Energy Management Equipment (PAZX) under the UL Standard for Safety 916.

Suitable for plenum mounting.

EMC Directive 89/336/EEC (European CE Mark).

FCC Part 15, Subpart J, Class A.



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to requirements of ASHRAE Standard 110 is the responsibility of the BACnet Manufacturers Association (BMA). BTL is a registered trademark of the BMA.

Ordering Information

Item number	Description
VLC-651R	BACtalk field controller for unit ventilator, fan-coil, and multi-speed motor applications

Specifications subject to change without notice.